


STANDARD Supports

STEEL

3 mm thick steel with an 800-micron black Polyamide coating.

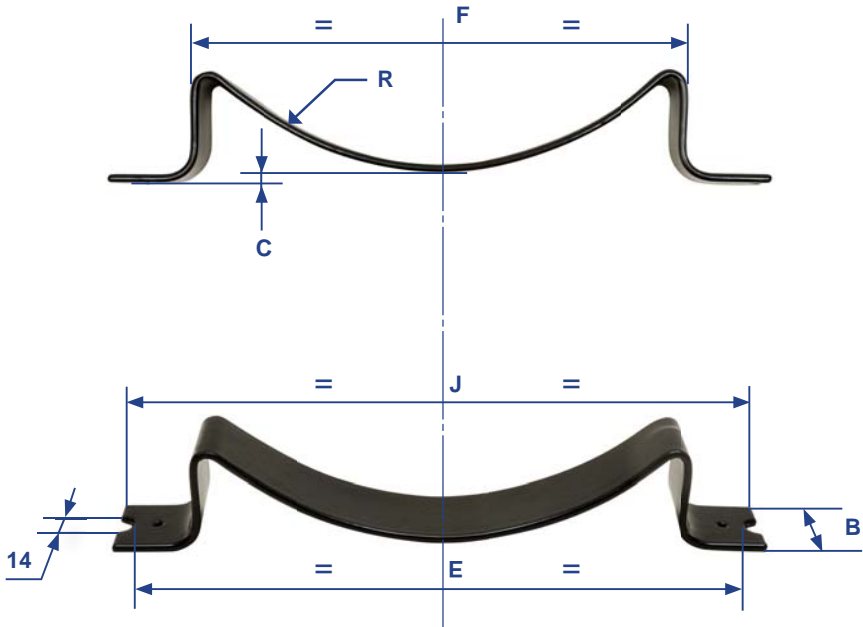

ALK Ref.	Tank Diameter = D	R	E	F	B	J	C
76.100.00	100	50	98	78	40	110	4
76.150.00	150	75	148	130	40	160	4
76.200.00	200	100	198	149	40	210	5
76.206.00	206	103	204	155	40	216	5
76.246.00	246	123	244	172	40	256	5
76.250.00	250	125	248	176	40	260	5
76.250.01	250	125	248	176	40	260	1,5
76.275.00	Replaced by 76.276.00						
76.276.00	275 - 276	138	274	202	40	286	5
76.300.00	300	150	298	226	40	310	5
76.310.00	310	155	308	236	40	320	6
76.320.00	320	160	318	246	40	330	8
76.350.00	350	175	348	265	40	360	10
76.396.00	396	198	394	311	40	406	10
76.400.00	400	200	398	315	40	410	10

Dimensions in millimetres
D = External Diameter of the Tank in mm