


## "MIXED" Clamps

MIXED

Black-coloured "**Polyamide**" 6 support with 30% fibreglass strengthening.



Is fitted instead of a "Standard" steel support, type 76.xxx.xx (see details on page 6), they have the same space requirement dimensions.

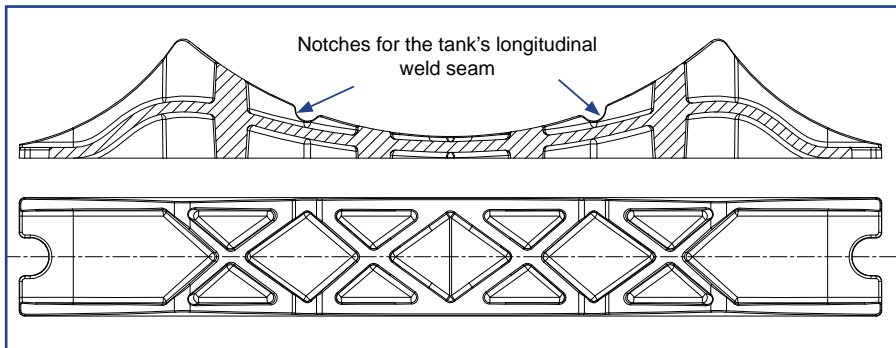

Due to its composition, this composite support can come directly into contact with the tanks and comply with standard 87/404/CE.



This support enables a substantial weight saving in comparison to steel and prevents any corrosion over time.

## Steel "U" and composite support

① - **STANDARD "U"** in electrogalvanised steel with an 800-microns black Polyamide coating. M10 thread. See full table on page 5.


② - **"COMPOSITE"** support that you can buy on its own (individually) or in KIT format with STANDARD "U".

Just Support Ref. = "COMPOSITE" Support sold on its own individually.

KIT Ref. = 2 STANDARD "U" + 2 "COMPOSITE" Supports + 4 Nylstop M10 nuts.

③ - **Nylstop M10 nuts**. Bag of 4 Nylstop M10 nuts, **ALK Ref. = 78.000.00**.

This bag can be sold on its own but is automatically included in all our KITS.

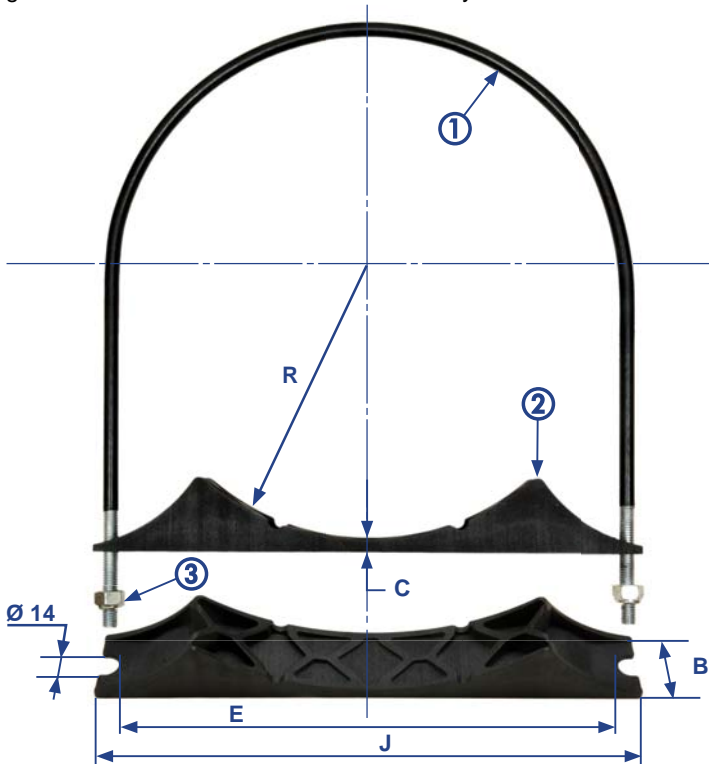

ALK Ref. Just Support	ALK Ref. KIT	Tank Diameter = D	R	E	B	J	C
98.150.00	99.150.00	150	75	148	44	170	7
98.200.00	99.200.00	200	100	198	44	220	8
98.250.00	99.250.00	250	125	248	44	270	8
98.300.00	99.300.00 (*) 99.300.01 (*)	300	150	298	44	320	8
98.350.00	99.350.00	350	175	348	44	370	13
98.400.00	99.400.00	400	200	398	44	420	13

Dimensions in millimetres

D = External Diameter of the Tank in mm

(\*) = 99.300.00 Sold with "U" 75.300.00 / 99.300.01 Sold with "U" 75.300.01