


One-part "STRAP" Clamps

STEEL




Complete Assembled clamp

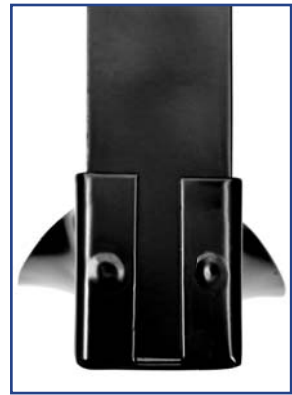

Strap fixing on support

- **Increased safety**, with two internal weld seams and two external weld spots at the strap anchorage point on the support.

- These clamps are "**Phosphated**" before being painted, which protects the steel from corrosion and helps the paint to bond.

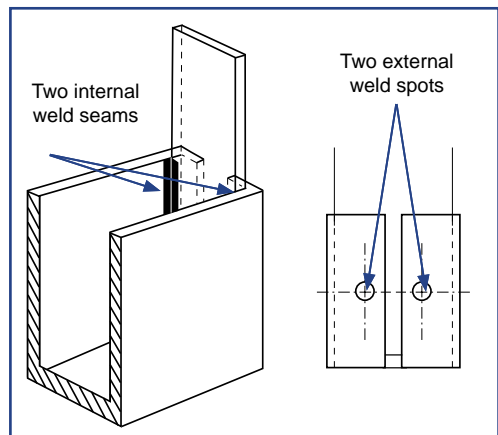

STEEL

One-part "STRAP" Clamps

Sold individually - 2 mm thick steel, "Phosphated" then coated with matt black paint or electrogalvanised.


One-part "STRAP" clamp, sold individually, assembled, in a plastic bag:

1 Clamp + 2 Standard M12 nuts. Additional Standard or Nylstop M12 nuts are also sold separately in bags of 4.

RUBBER protection KIT see details on pages 4 and 15	
Enables compliance with Standard 87/404/EC	
ALK Ref.	Clamp Diameter
93.206.00	206
93.000.00	246
	276
	310
93.396.00	396

2 Standard M12 nuts

Bag of 4 additional nuts	
STANDARD M12 ALK Ref.	Thread
78.200.00	M12
NYLSTOP M12 ALK Ref.	Thread
78.300.00	M12

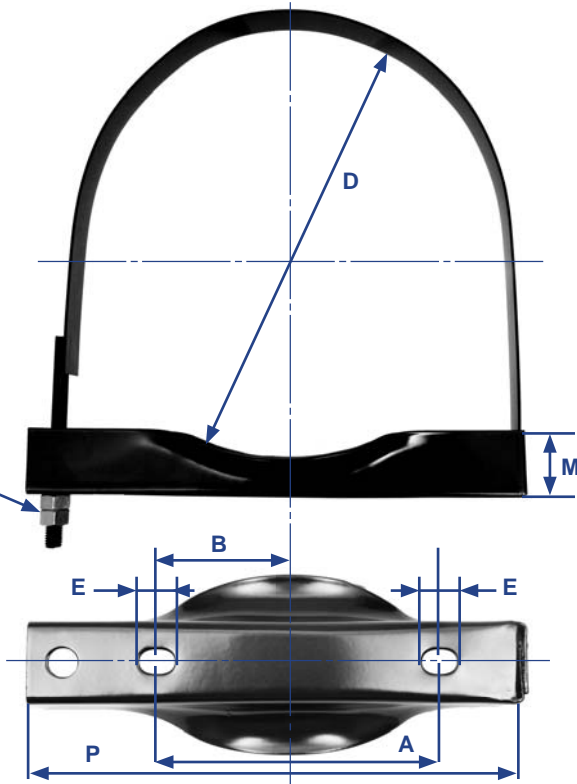

ALK Ref. Matt Black	ALK Ref. Electrogalvanised	Tank Diameter = D	A	B	M	P	E
88.206.00	88.206.00Z	206	130	65	43	227	11x16
88.246.00	88.246.00Z	246	180	90	43	267	11x16
88.276.00	88.276.00Z	276	180	90	43	297	11x16
88.310.00	88.310.00Z	310	200	100	43	331	11x16
88.396.00	88.396.00Z	396	250	125	43	417	11x16
95.206.00	95.206.00Z	206	122	61	43	227	12x16
95.246.00	95.246.00Z	246	162	81	43	267	12x16
95.276.00	95.276.00Z	276	192	96	43	297	12x16
95.310.00	95.310.00Z	310	227	113	43	331	12x16
95.396.00	95.396.00Z	396	307	153	43	417	12x16

Dimensions in millimetres

D = External Diameter of the Tank in mm