

# Foldable "STRAP" Clamps

STEEL



Complete Assembled Clamp.  
System Patented by "O.H.M.I"



- These foldable clamps provide 50% gain in the storage and transport volume compared to 1-part clamps.

Strap attached to the support  
with a 10mm-diameter full shaft

- These clamps are "**Phosphated**" before being painted, which protects the steel from corrosion and helps the paint to bond.



Full KIT = 2 Foldable clamps + 4 standard M12 nuts

# STEEL

## Foldable "STRAP" Clamps

Sold in KITS of two clamps. 2 mm thick steel, "Phosphated" then coated with matt black paint or electrogalvanised. .

**Foldable "Strap" Clamps** sold in KITS containing two clamps in a plastic bag:  
2 foldable clamps + 4 standard M12 nuts.

**RUBBER protection KIT**  
see details on pages 4  
and 15


Enables compliance with  
Standard 87/404/EC

ALK Ref.	Clamp Diameter
93.206.00	206
	246
	276
93.000.00	310
	396

2 Standard M12 nuts

**Bag of 4 additional nuts**

STANDARD M12 ALK Ref.	Thread
78.200.00	M12
NYLSTOP M12 ALK Ref.	Thread
78.300.00	M12

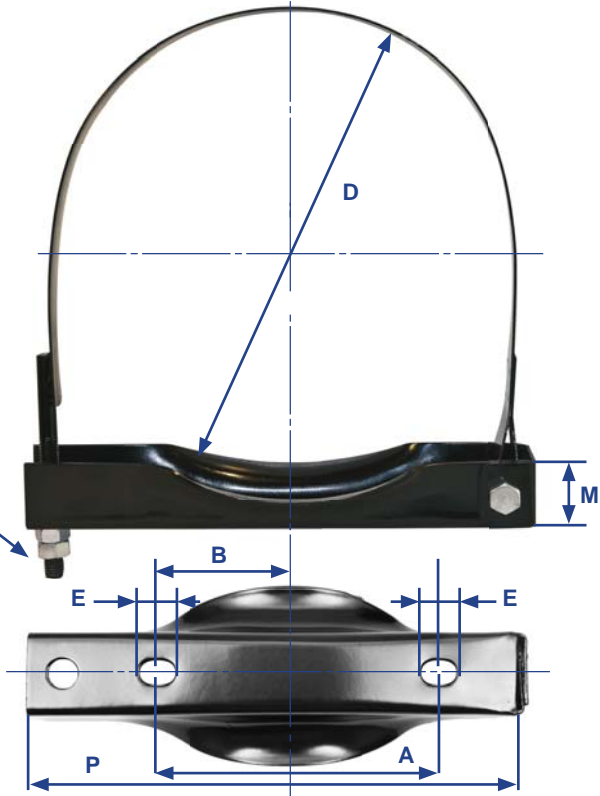

ALK Ref. Matt Black	ALK Ref. Electrogalvanised	Tank Diameter = D	A	B	M	P	E
70.206.00	70.206.00Z	206	130	65	43	230	11x16
70.246.00	70.246.00Z	246	180	90	43	270	11x16
70.276.00	70.276.00Z	276	180	90	43	300	11x16
70.310.00	70.310.00Z	310	200	100	43	335	11x16
70.396.00	70.396.00Z	396	250	125	43	420	11x16
73.206.00	73.206.00Z	206	122	61	43	230	12x16
73.246.00	73.246.00Z	246	162	81	43	270	12x16
73.276.00	73.276.00Z	276	192	96	43	300	12x16
73.310.00	73.310.00Z	310	227	113	43	335	12x16
73.396.00	73.396.00Z	396	307	153	43	420	12x16

Dimensions in millimetres

D = External Diameter of the Tank in mm